

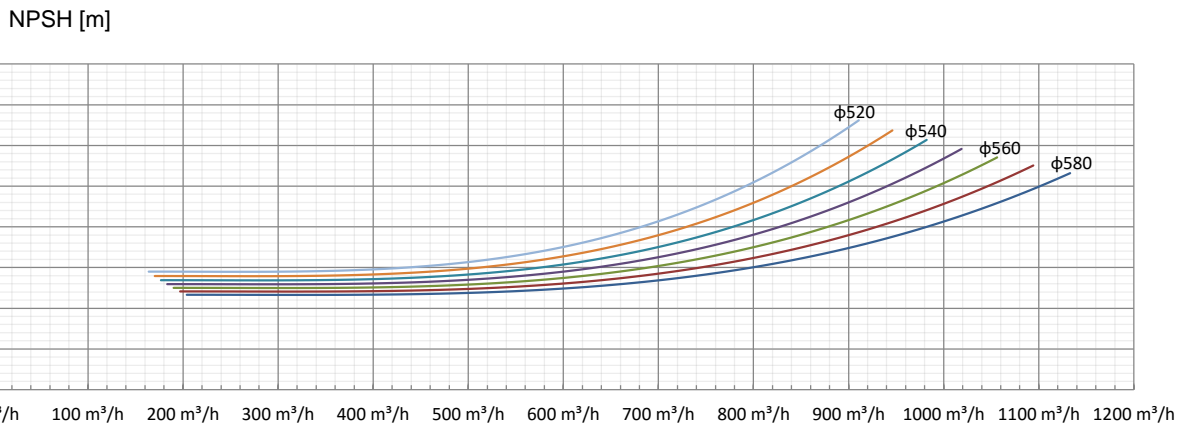
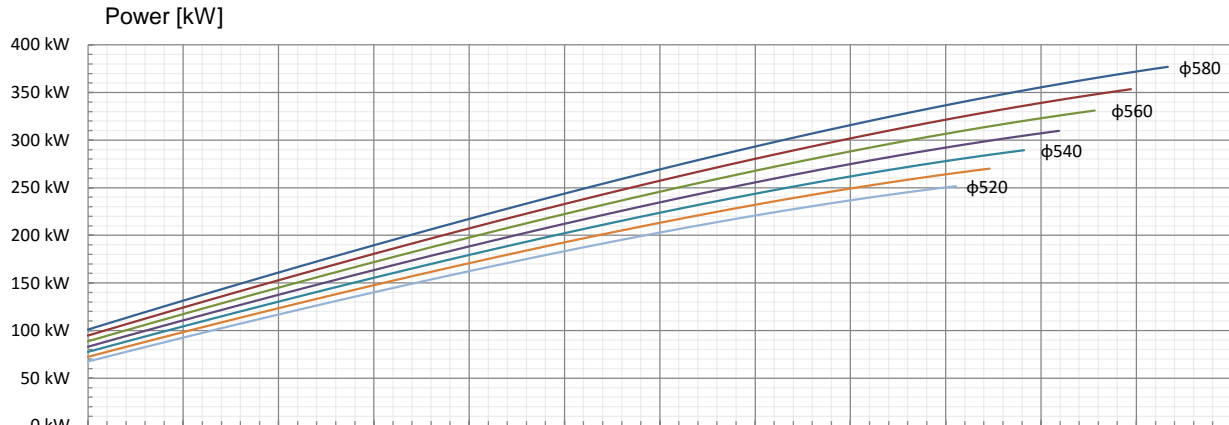


Pump Model	GHP 58-29	Flange Detail		Part / DWG #	
Pump Speed	1490 rpm Clockwise	Suction	DN 300 - PN 64	1st Impeller	58-17
Max No. Stages	12 Stages	Delivery	DN 250 - PN 160	Impeller	58-23
Max Head	1560.0 m	Pumped Medium - Water @		Diffuser	58-21
Max Flowrate	1133.0 m <sup>3</sup> /h	Temperature	20 °C	Last Diffuser	58-21
Max Efficiency	82.0%	Viscosity	1 cP	Overflow	58-22
Max Abs Power	377.0 kW Per Stage	Density	998 kg/m <sup>3</sup>	Stage Casing	58-42

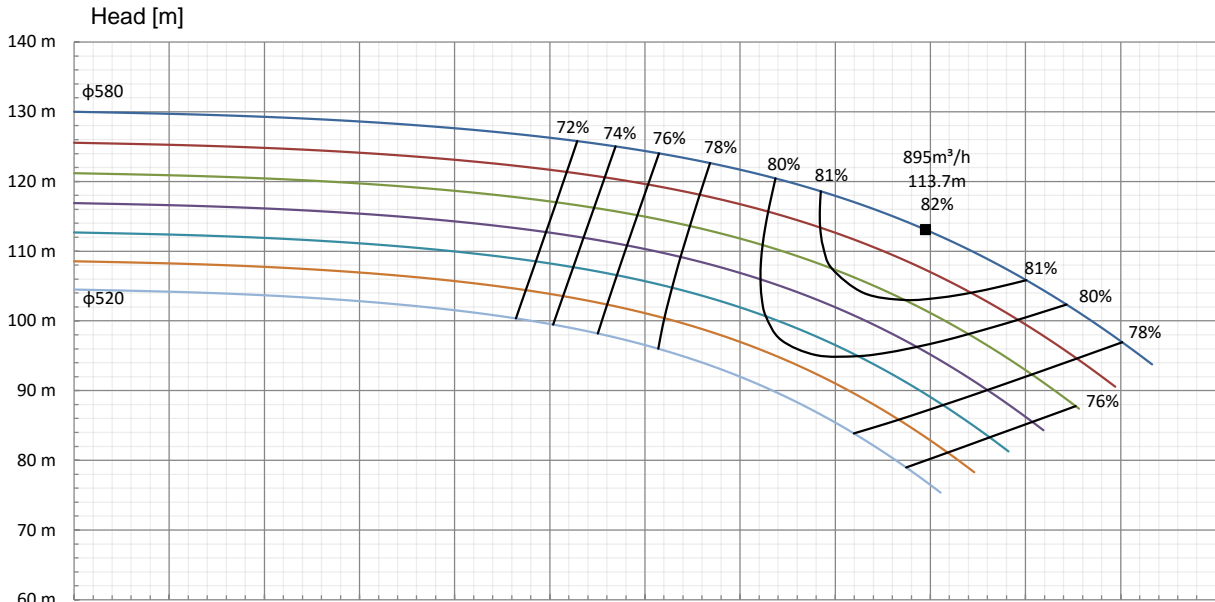

DOCUMENT NUMBER:	SCAG-R-204	ENGINEER:	Craig Adamson
REVISION:	3	PROJECT:	
DATE:	2016-06-15	CUSTOMER:	

Pump Model	GHP 58-29	Flange Detail		Part / DWG #	
Pump Speed	1490 rpm Clockwise	Suction	DN 300 - PN 64	1st Impeller	58-17
Max No. Stages	12 Stages	Delivery	DN 250 - PN 160	Impeller	58-23
Max Head	1560.0 m	Pumped Medium - Water @		Diffuser	58-21
Max Flowrate	1133.0 m <sup>3</sup> /h	Temperature	20 °C	Last Diffuser	58-21
Max Efficiency	82.0%	Viscosity	1 cP	Overflow	58-22
Max Abs Power	377.0 kW Per Stage	Density	998 kg/m <sup>3</sup>	Stage Casing	58-42

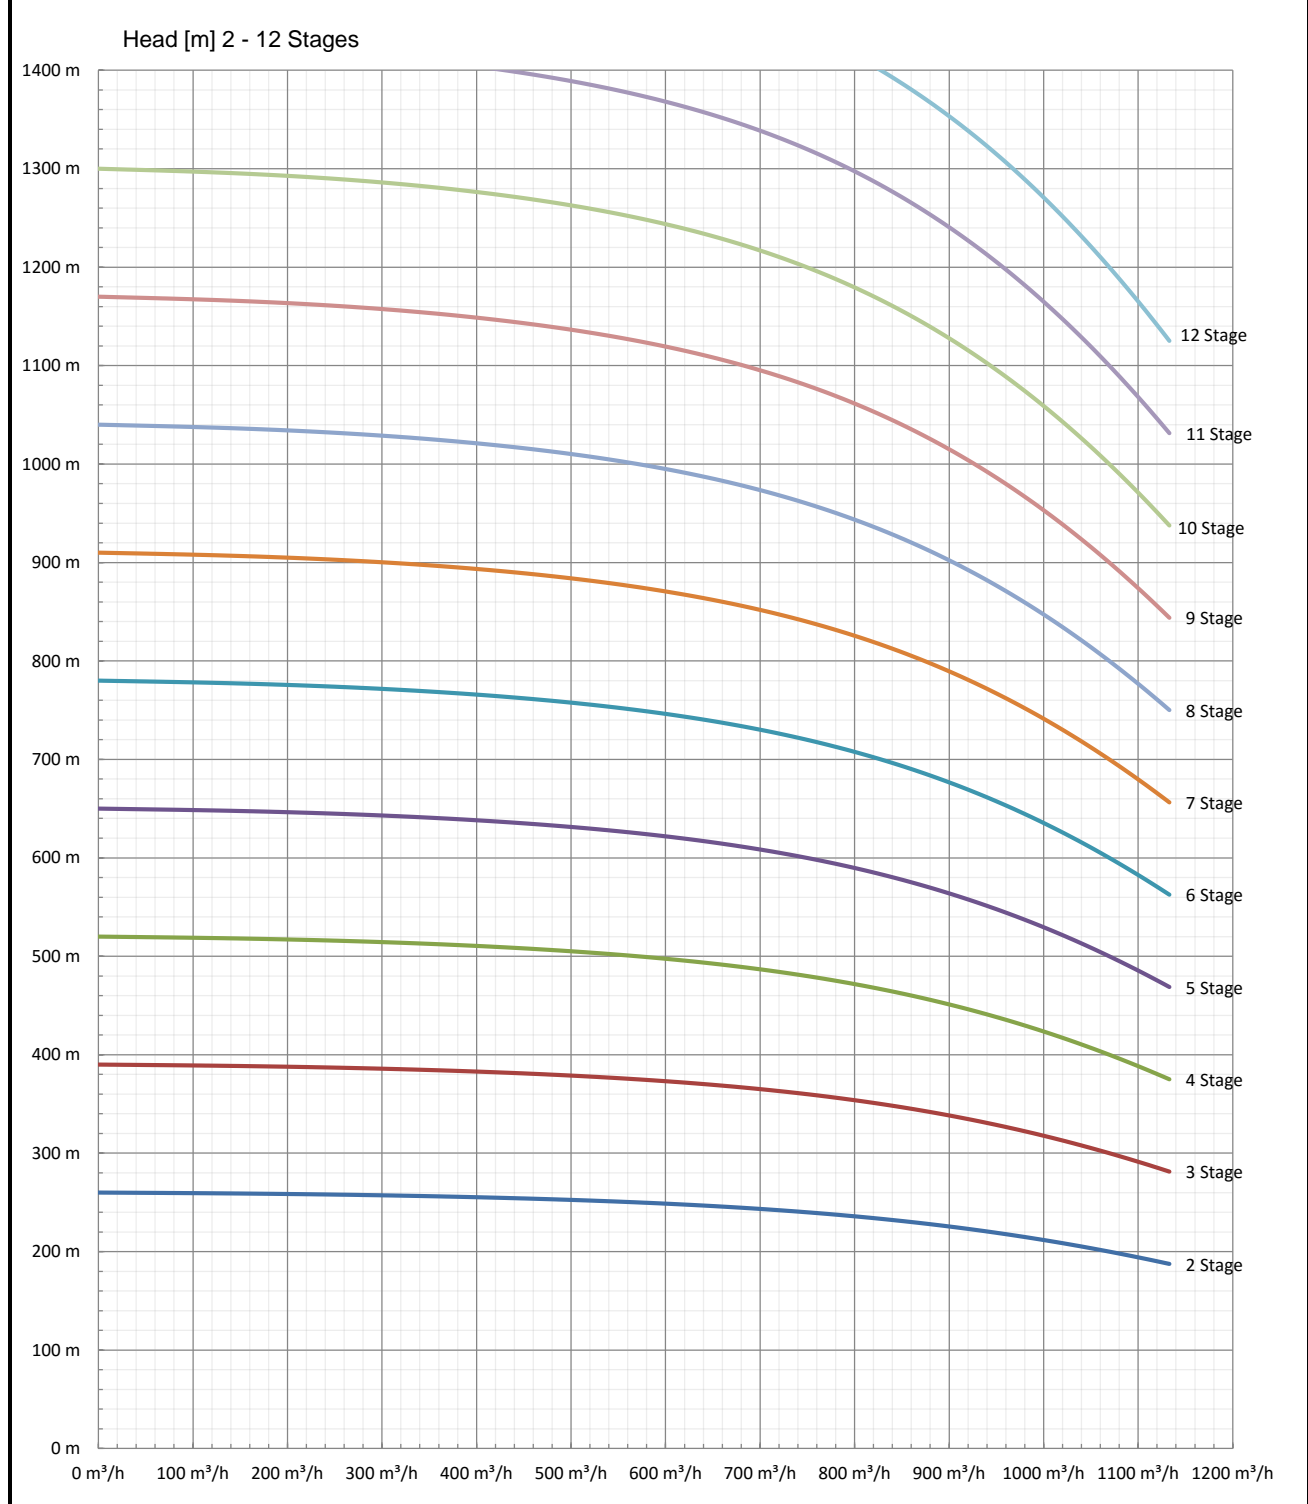

DOCUMENT NUMBER:	SCAG-R-204	ENGINEER:	Craig Adamson
REVISION:	3	PROJECT:	
DATE:	2016-06-15	CUSTOMER:	